



Security

MINI VAULT DOOR & NEW CLASS 1 SERIES



PRIVACY • SECURITY • ASSET



STRENGTH




CUSTOMER SERVICE



WORLD CLASS

SPECIFICATIONS

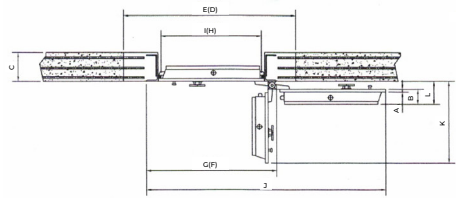

Ref	Specifications (mm)	Mini Vault Door	New Class 1
A	Front Door Plate Thickness	12	25.4
B	Door Thickness	135	149
C	Minimum Wall Thickness	250	250
(D)	Wall Slot Drilling Height	1,982	1,985
E	Wall Slot Drilling Width	960	1,030
(F)	Door & Frame Height	2,032	2,070
G	Door & Frame Width	1,090	1,190
(H)	Door Height After Installation	1,900	1,900
I	Door Width After Installation	850	900
J	Door & Frame Width at 180° Open	1,959	2,050
K	Distance at 90° Open	967	1,027
L	Distance at 180° Open	207	270
	Moving Bolts / Bolt Diameter 38 mm	7 Sets	7 Sets
	Fixed Bolts / Bolt Diameter 38 mm	5 Sets	5 Sets
	Weight +/- 10%	357 Kg.	650 Kg.

QUALIFICATIONS



SSI (Structural Steel Integration)

Crafted from reinforced thick steel and seamlessly welded, boasts a strong unified structure that is highly resistant to forced entry and nearly indestructible.



XLarge Bolts

Equipped with 38 mm diameter bolts and rust-resistant coating, these locks strengthen the door panel and protect against prying and cutting, enhancing security.



CS350 Barrier Material

The CS350-infused material boasts fire resistance, anti-drill strength, and extra thickness for superior protection against heat, impact, and fire.



Multi Protection Door

The **Mini Vault Door**, features a 12mm thick steel front plate, with an overall door thickness of 135 mm.

New Class 1, features a 25.4 mm thick steel front plate, with an overall door thickness of 149 mm.

Constructed with special-grade steel, the door features a 4-hour, 1,000°C fire-resistant barrier, drill-resistant plate, and safety glass for secure locking areas.



Grille Gate and Ventilator

The **Grille Gate** has a dual-position key lock mechanism for increased security in daily use.

The **Ventilator** ensures proper air circulation in the secure room and also serves as an emergency system for communication and food delivery channel.



S&G Combination Lock

The UL-certified S&G combination locks feature a 4-digit code with over 100 million possible combinations and include a combination ring to deter code theft.



8 Lever Key Lock

This lock has an 8-lever, double-bit system and comes with a durable, hard-to-copy metal key, increasing security against counterfeiting.



Automatic Relock System

The safe has an automatic relock system with safety glass and a solid code mechanism to prevent tampering, ensuring reliable security.



Drill Protection Alloy Steel

With a puncture-resistant steel plate made from a custom alloy, it protects the key code mechanism, keys, and all points.



High Quality Paint

The door has been polished and treated for rust prevention before being painted in an automotive oven to ensure a long-lasting and shiny finish.

